


**PRODUCT DATA SHEET**

PAGE 1/2

SE80 - Retractable supply post  
Item no. M5038070160**TECHNICAL DATA**

Dimensions:	1350x1400x1110mm (HxWxL)
Installation depth:	1480mm
Extending height:	590mm
Load capacity:	25t DIN EN 124 - C250
Material:	Cast aluminum, Aluminum, PVC, Concrete
Drainage:	via integrated drainage system in concrete shaft
Heating:	Heating device 20W for Condensation reduction incl. MCB 2A C 1P
Ingress protection:	IP44: Sockets / IP54: Distribution modules
Protection class:	I
Equipment:	12 x Protective contact socket 16A 2P+E 230V 3 x CEE 16A 5P 400V 2 x CEE 32A 5P 400V 1 x CEE 63A 5P 400V 1 x CEE 125A 5P 400V 12 x MCB 16A C 1P 3 x MCB 16A C 3P 2 x MCB 32A C 3P 1 x MCB 125A C 3P (back-up fuse) 3 x RCD 63/0,03A 4P 1 x RCD 63/0,3A 4P 1 x RCD 125/0,3A 4P 4 x D02 safety device 63A 3P (back-up fuse)
max. back-up fuse in the pit:	NH-000 200A
Power supply terminals:	5x150qmm
Weight:	approx. 2.700kg

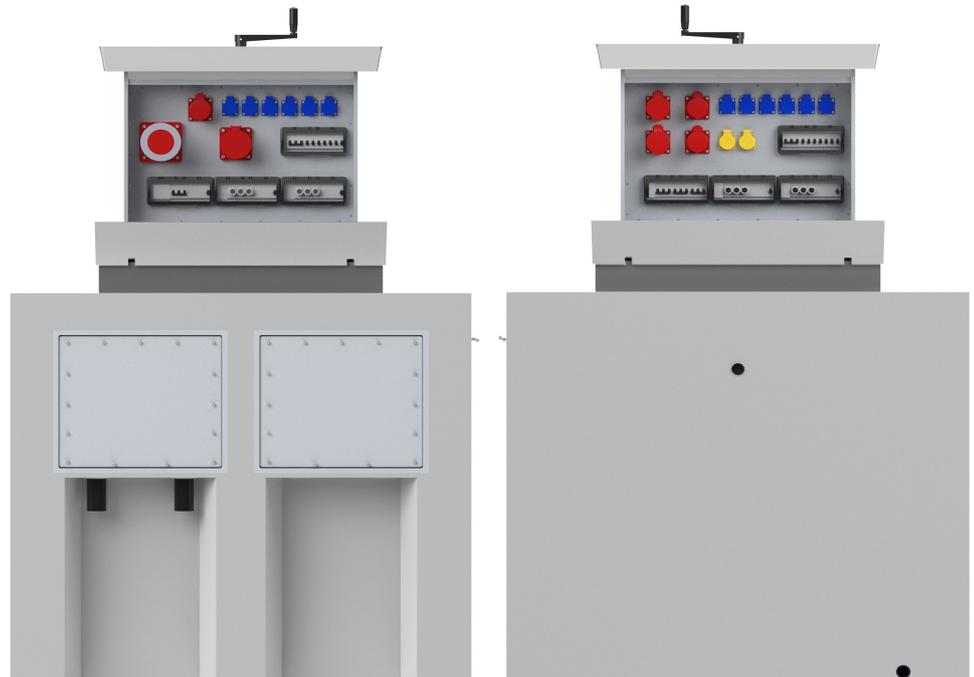