

**PRODUCT DATA SHEET**

PAGE 1/2

SEK80 - Underfloor distributor with hinged cover

Item no. M5048100013

**TECHNICAL DATA**

Dimensions:	880x630x650mm (LxWxD)
Installation depth:	650mm
Dimensions visible cover:	800x550mm (LxW)
Load capacity:	1,5t DIN EN 124 - A15
Material:	V2A stainless steel (1.4301)
Interlocking:	via locking system incl. actuation key
Drainage:	on site through pipe socket Ø108mm to the local sewerage system
Ingress protection:	IP54
Protection class:	I
Equipment:	4 x Protective contact socket 16A 2P+E 230V 2 x CEE 16A 5P 400V 2 x CEE 32A 5P 400V 4 x MCB 16A C 1P 1 x MCB 16A C 3P 2 x MCB 32A C 3P 1 x RCD 63/0,03A 4P (additionally: 1 x MCB 6A B 1P for the heating - optionally available)
max. back-up fuse:	63A
Power supply terminals:	5x25qmm
Weight:	approx. 130kg




# MOSER SYSTEMELEKTRIK GMBH

CONNECTION COLUMNS ENERGY BOLLARDS  
UNDERGROUND DISTRIBUTORS STANDING CABINETS  
KERNERSTRASSE 15 74405 GAILDORF GERMANY

## PRODUCT DATA SHEET


PAGE 2/2

### DIMENSIONS

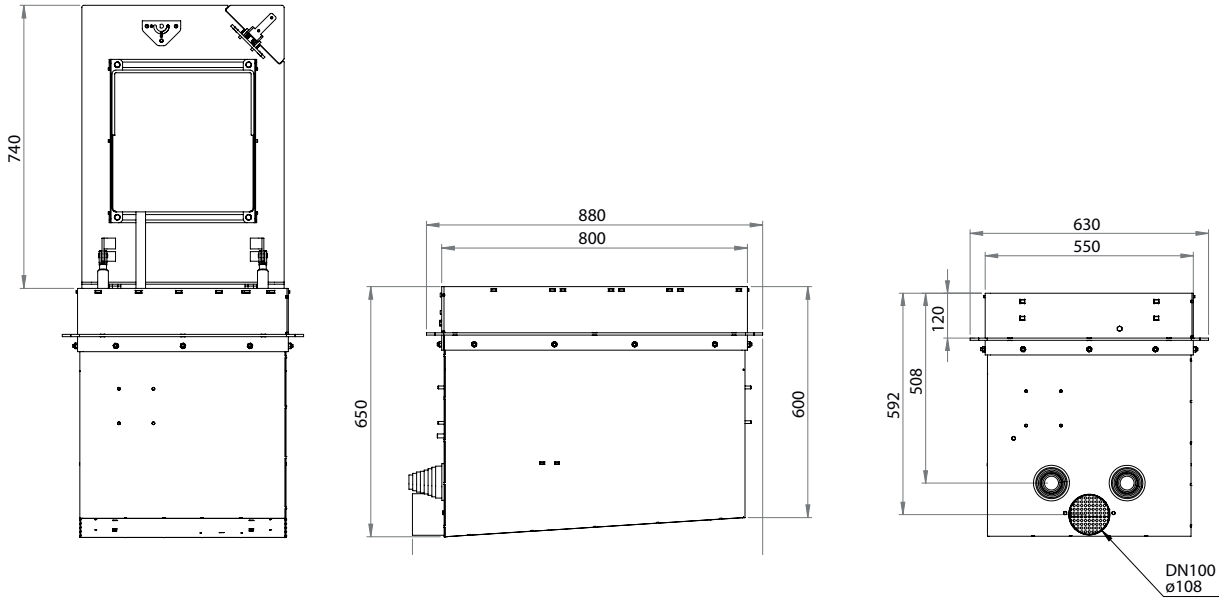

All dimensions in millimeters.

### WIRING DIAGRAM

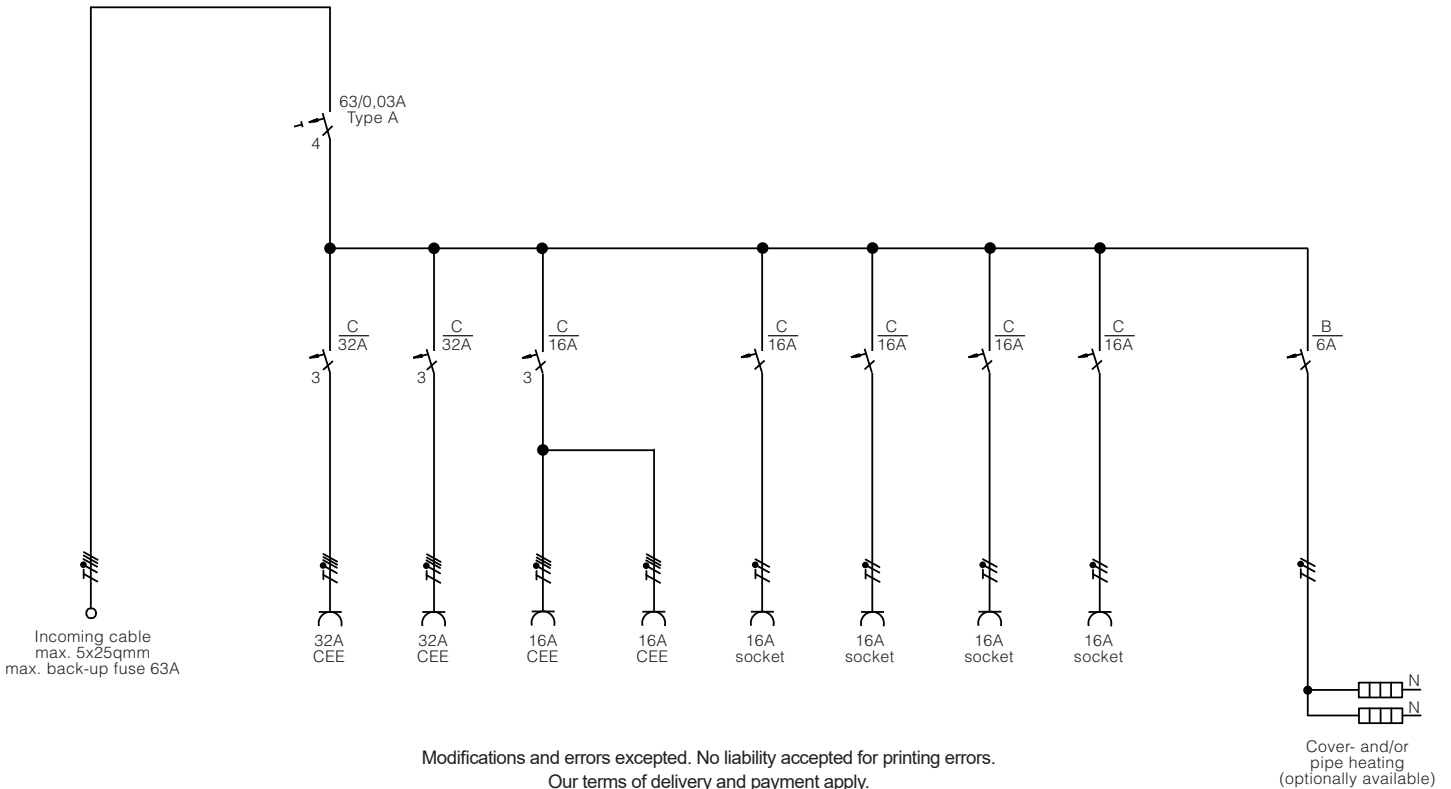

Modifications and errors excepted. No liability accepted for printing errors.  
Our terms of delivery and payment apply.