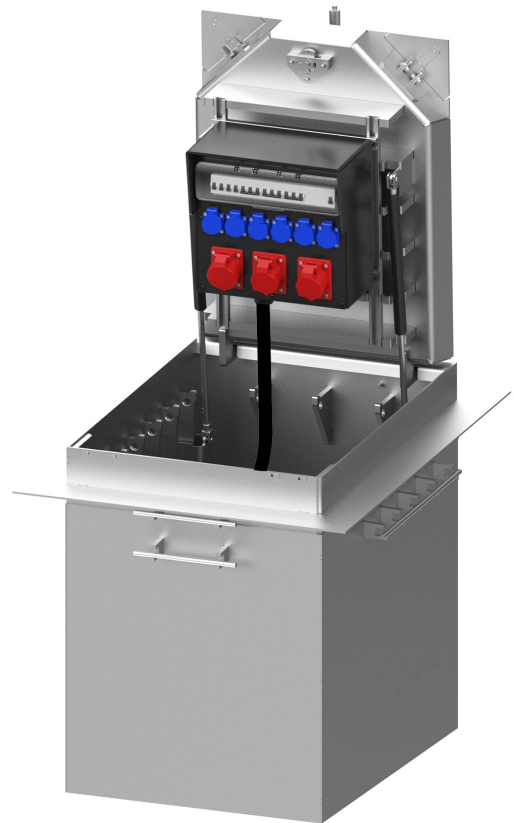


**PRODUCT DATA SHEET**

PAGE 1/2

SEK80 - Underfloor distributor with hinged cover

Item no. M5048400033

**TECHNICAL DATA**

| | |
|---------------------------|--|
| Dimensions: | 1050x798x900mm (LxWxD) |
| Installation depth: | 900mm |
| Dimensions visible cover: | 862x610mm (LxW) |
| Load capacity: | 40t DIN EN 124 - D400 |
| Material: | V2A stainless steel (1.4301) |
| Interlocking: | via locking system incl. actuation key |
| Drainage: | on site through pipe socket Ø108mm to the local sewerage system |
| Ingress protection: | IP54 |
| Protection class: | I |
| Equipment: | 6 x Protective contact socket 16A 2P+E 230V 2 x CEE 16A 5P 400V 1 x CEE 32A 5P 400V 3 x MCB 16A C 1P 1 x MCB 16A C 3P 1 x MCB 32A C 3P 1 x RCD 63/0,03A 4P (additionally: 1 x MCB 6A B 1P for the heating - optionally available) |
| max. back-up fuse: | 63A |
| Power supply terminals: | 5x25qmm |
| Weight: | approx. 270kg |




MOSER SYSTEMELEKTRIK GMBH

CONNECTION COLUMNS ENERGY BOLLARDS
UNDERGROUND DISTRIBUTORS STANDING CABINETS
KERNERSTRASSE 15 74405 GAILDORF GERMANY

PRODUCT DATA SHEET

PAGE 2/2

DIMENSIONS

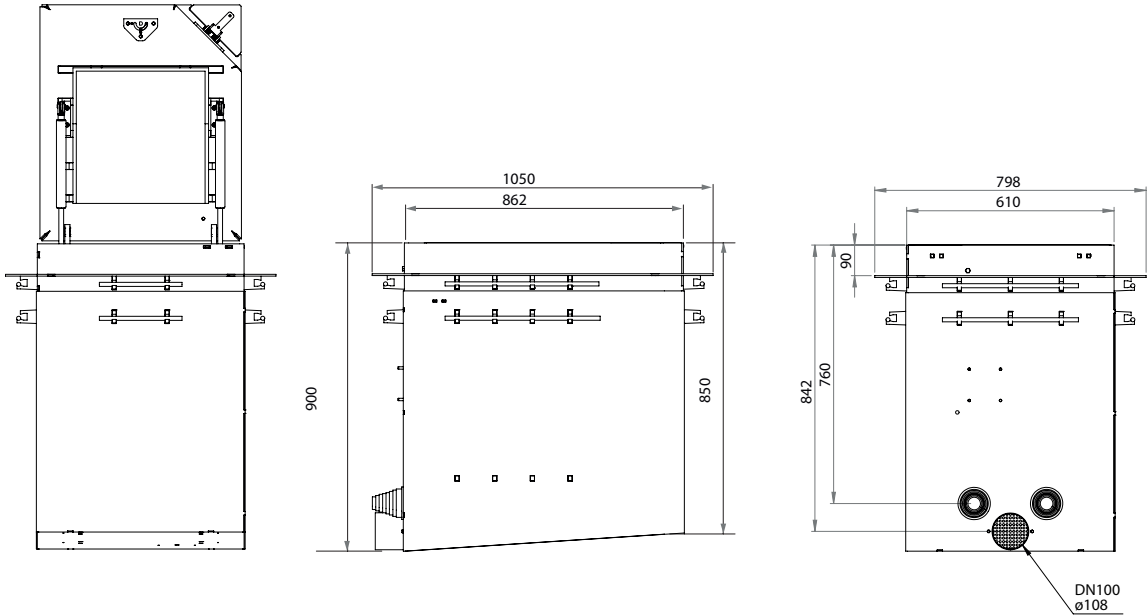

WIRING DIAGRAM

All dimensions in millimeters.

