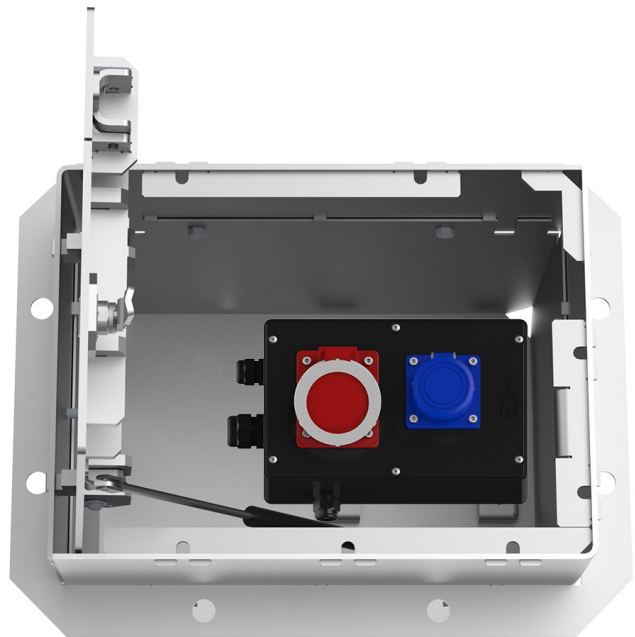


**PRODUCT DATA SHEET**

PAGE 1/2

SEK30 - compact underfloor distributor

Item no. M5063000043

**TECHNICAL DATA**


Dimensions:	480x380x420mm (LxWxD)
Installation depth:	400mm
Dimensions visible cover:	400x300mm (LxW)
Load capacity:	12,5t DIN EN 124 - B125
Material:	V2A stainless steel (1.4301)
Interlocking:	by sash lock (square)
Drainage:	via four recesses in the lower part of the housing
Ingress protection:	IP67
Protection class:	I
Equipment:	1 x CEE socket 32A 5P 400V IP67 1 x Protective contact socket 16A 2P+E 230V IP68
max. back-up fuse:	32A / 16A
Power supply terminals:	1x5x10qmm, 1x3x10qmm
Cable gland (Infeed):	1 x M32 (CEE 32A) 1 x M20 (Protective contact socket)
Cable gland (Grounding):	1 x M20
Weight:	approx. 25kg



PRODUCT DATA SHEET


PAGE 2/2

DIMENSIONS

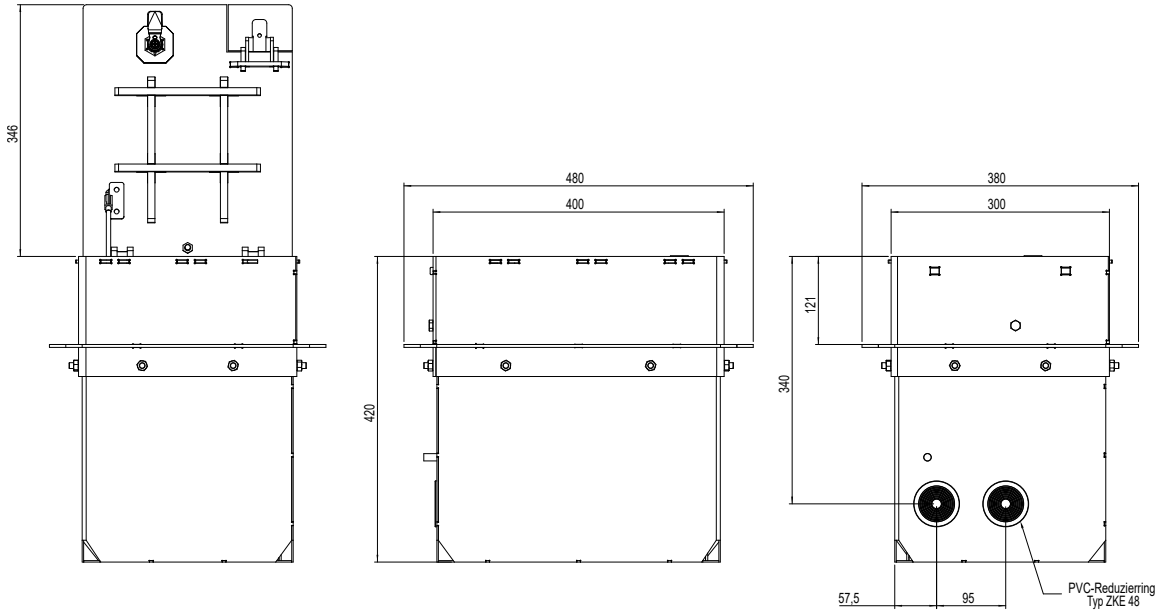

All dimensions in millimeters.

WIRING DIAGRAM

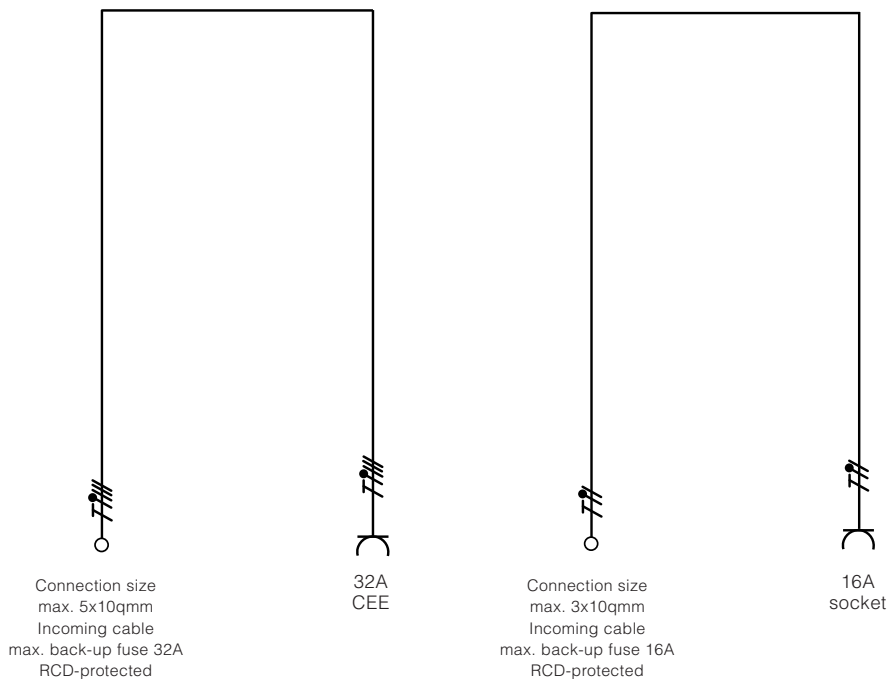

Modifications and errors excepted. No liability accepted for printing errors.
Our terms of delivery and payment apply.