

**PRODUCT DATA SHEET**

PAGE 1/2

MS290 Electrical connection column

Item no. MG21205434


**TECHNICAL DATA**

Dimensions:	290x314x1200mm (WxDxH)
Ingress protection:	IP44
Protection class:	I
Material:	Aluminum, anodized E6/EV1
Color:	silver
Equipment:	4 x Protective contact socket 16A 2P+E 230V 1 x CEE 16A 5P 400V 1 x CEE 32A 5P 400V 1 x CEE 63A 5P 400V 4 x MCB 16A C 1P 1 x MCB 16A C 3P 1 x MCB 32A C 3P 2 x MCB 63A C 3P 1 x RCD 63/0,03A 4P 1 x RCD 63/0,3A 4P
Other installations:	Heating device 20W 120-240V
max. back-up fuse:	100A
Power supply terminals:	5x35qmm
Light module:	LED Orientation light - with inserted LED light strip, water resistant shed - LED driver 24V - pre-wired on connection clamps 2x2x2,5qmm
Weight:	approx. 23kg




**PRODUCT DATA SHEET**  
 PAGE 2/2

**DIMENSIONS**

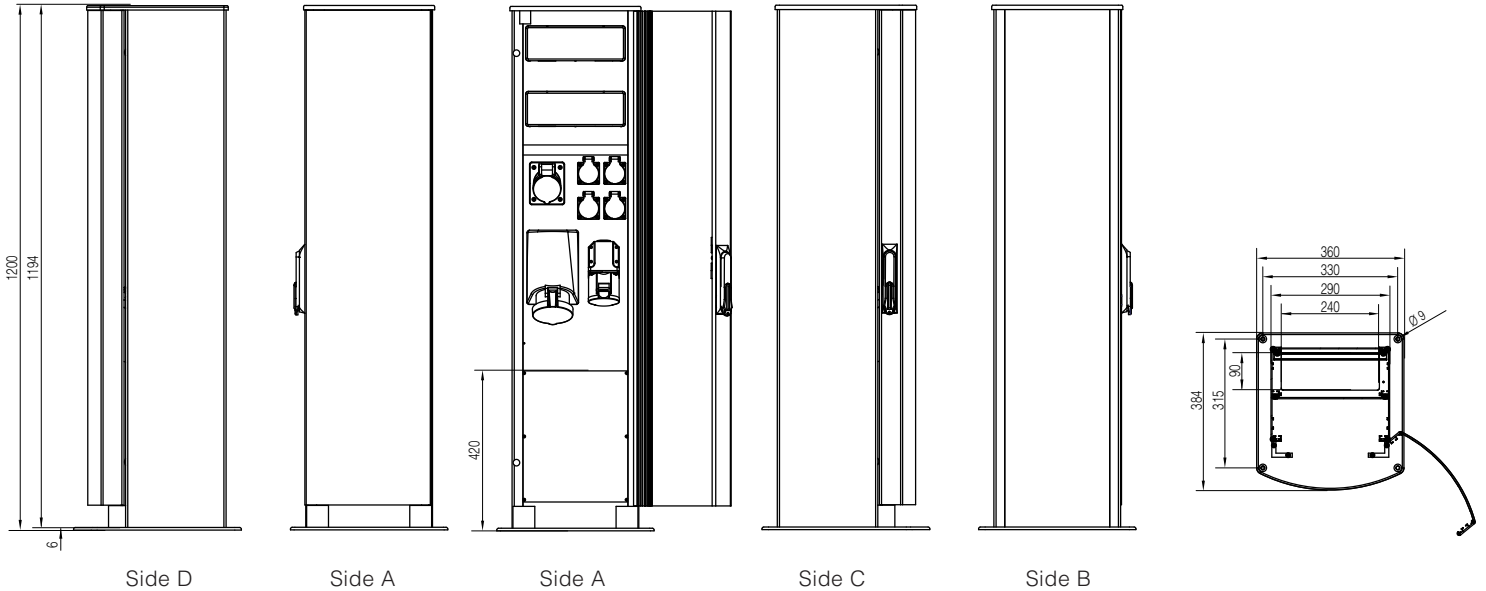

All dimensions in millimeters.

**WIRING DIAGRAM**

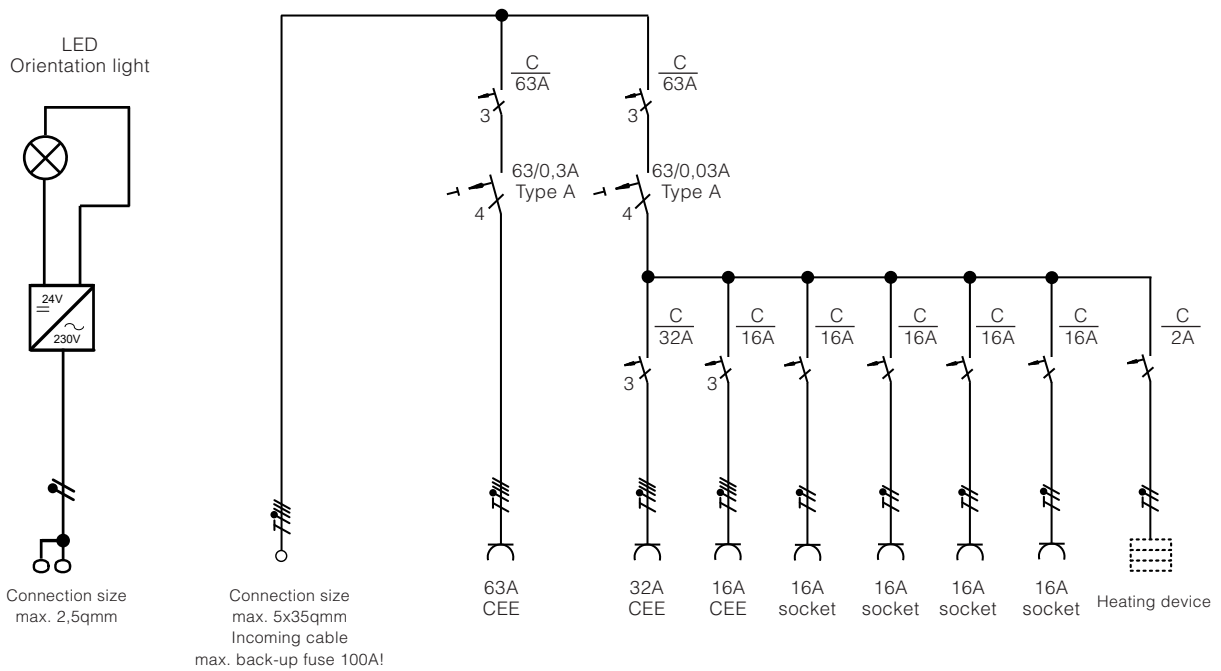

Modifications and errors excepted. No liability accepted for printing errors.  
 Our terms of delivery and payment apply.