


**PRODUCT DATA SHEET**

PAGE 1/2


SE56 - Retractable supply post  
Item no. M5035600630**TECHNICAL DATA**

Dimensions:	965x632x928mm (HxWxL)
Installation depth:	1075mm
Extending height:	520mm
Load capacity:	40t DIN EN 124 - D400
Material:	Cast aluminum, Aluminum, PVC, Concrete
Drainage:	via integrated drainage system in concrete shaft
Heating:	Heating device 20W for Condensation reduction incl. MCB 2A C 1P
Ingress protection:	IP44: Sockets / IP54: Distribution modules
Protection class:	I
Equipment:	3 x Protective contact socket 16A 2P+E 230V 2 x CEE 16A 3P 230V 1 x CEE 16A 5P 400V 1 x CEE 63A 5P 400V 5 x MCB 16A C 1P 1 x MCB 16A C 3P 2 x MCB 63A C 3P (back-up fuse) 1 x RCD 63/0,03A 4P 1 x RCD 63/0,3A 4P
max. back-up fuse in the pit:	NH-000 100A
Power supply terminals:	5x50qmm
Weight:	approx. 730kg

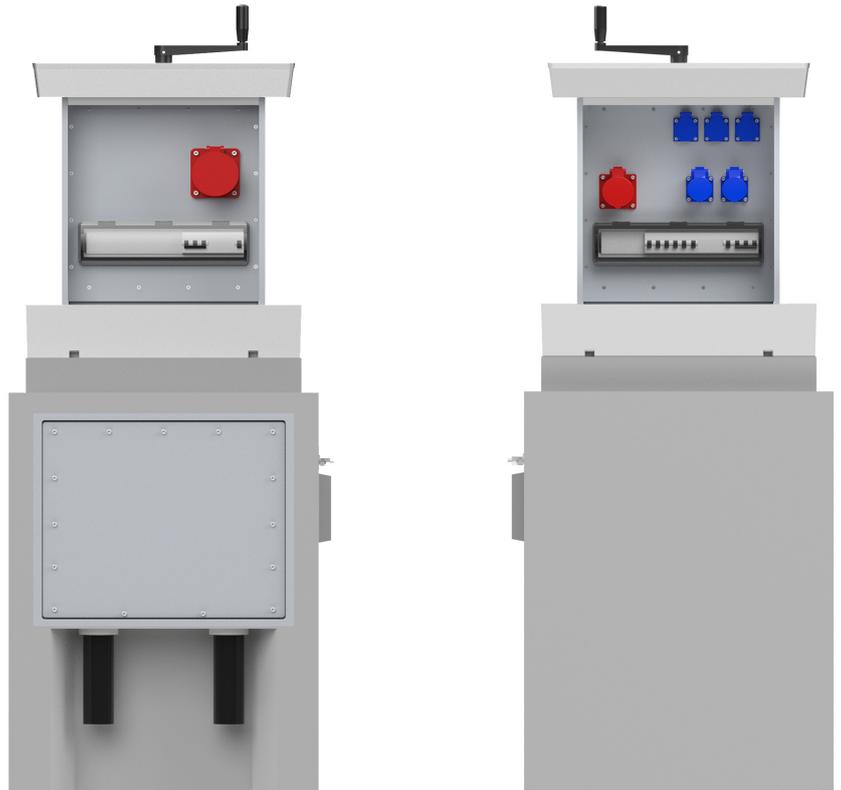


**PRODUCT DATA SHEET**  
 PAGE 2/2

**DIMENSIONS**

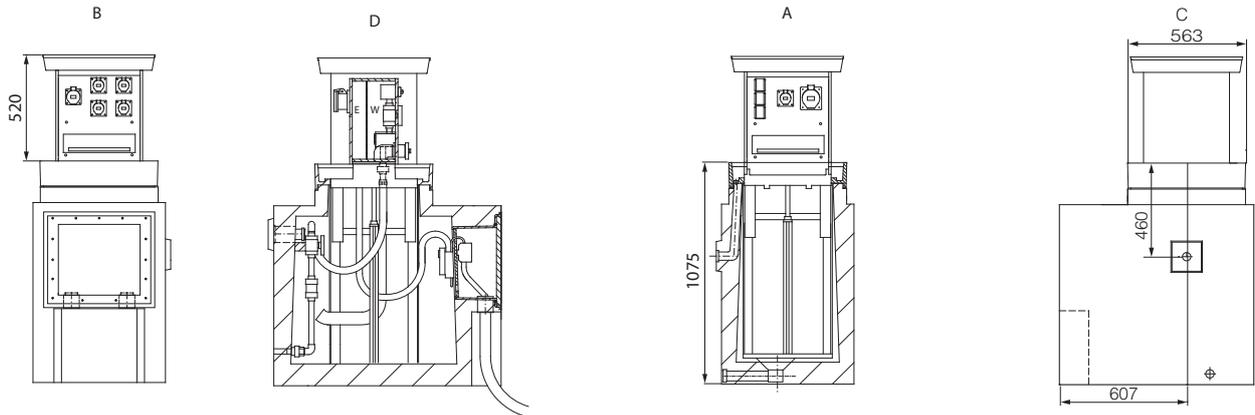

All dimensions in millimeters.

**WIRING DIAGRAM**

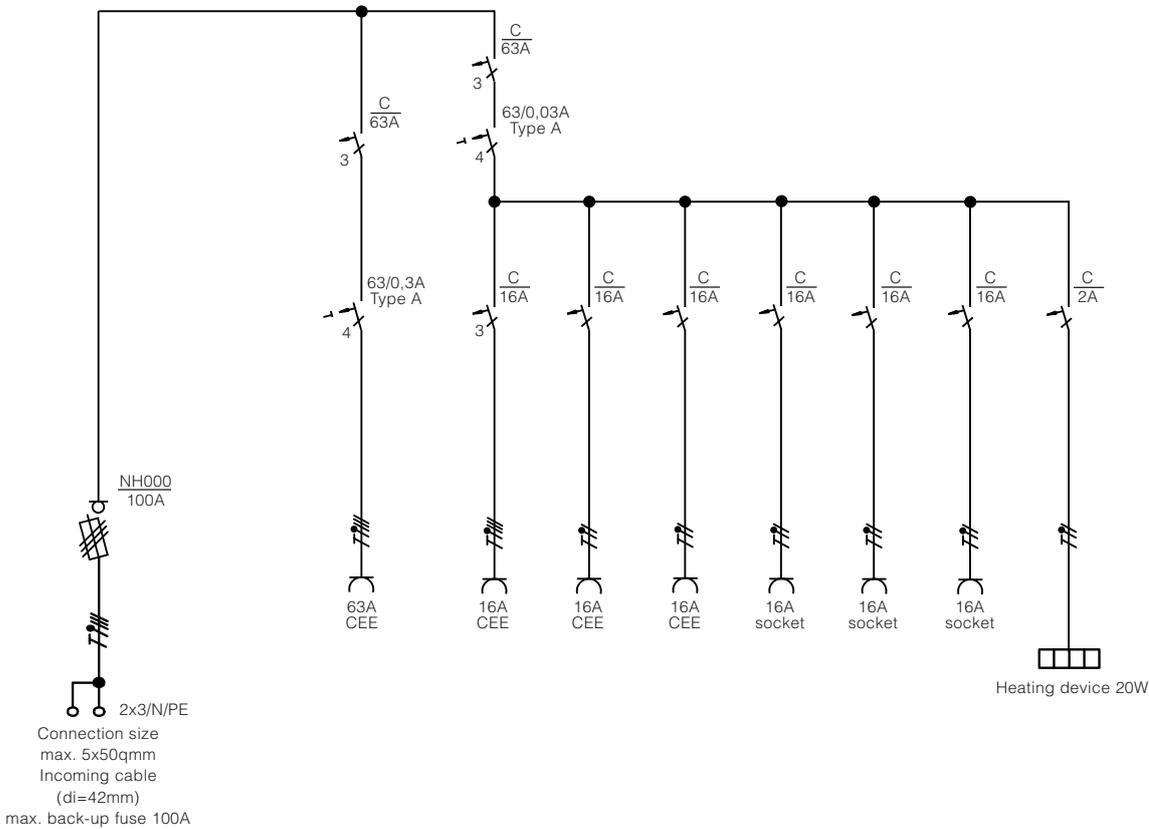

Modifications and errors excepted. No liability accepted for printing errors.  
 Our terms of delivery and payment apply.