


**PRODUCT DATA SHEET**

PAGE 1/2

SEH50 - Retractable supply post
Item no. M5035080530**TECHNICAL DATA**


Dimensions:	795x610x1036mm (HxWxL)
Installation depth:	905mm
Extending height:	466mm
Load capacity:	40t DIN EN 124 - D400
Material:	Cast aluminum, Aluminum, PVC, Concrete
Drainage:	via integrated drainage system in concrete shaft
Heating:	Heating device 20W for Condensation reduction incl. MCB 2A C 1P
Ingress protection:	IP44: Sockets / IP54: Distribution modules
Protection class:	I
Equipment:	1 x Double data socket 2xRJ45 Cat.6 4 x Protective contact socket 16A 2P+E 230V 2 x CEE 16A 5P 400V 2 x MCB 16A C 1P 2 x MCB 16A C 3P 1 x RCD 63/0,03A 4P 1 x Fresh water connection 1"
max. back-up fuse in the pit:	NH-000 63A
Power supply terminals:	5x50qmm
Weight:	approx. 700kg

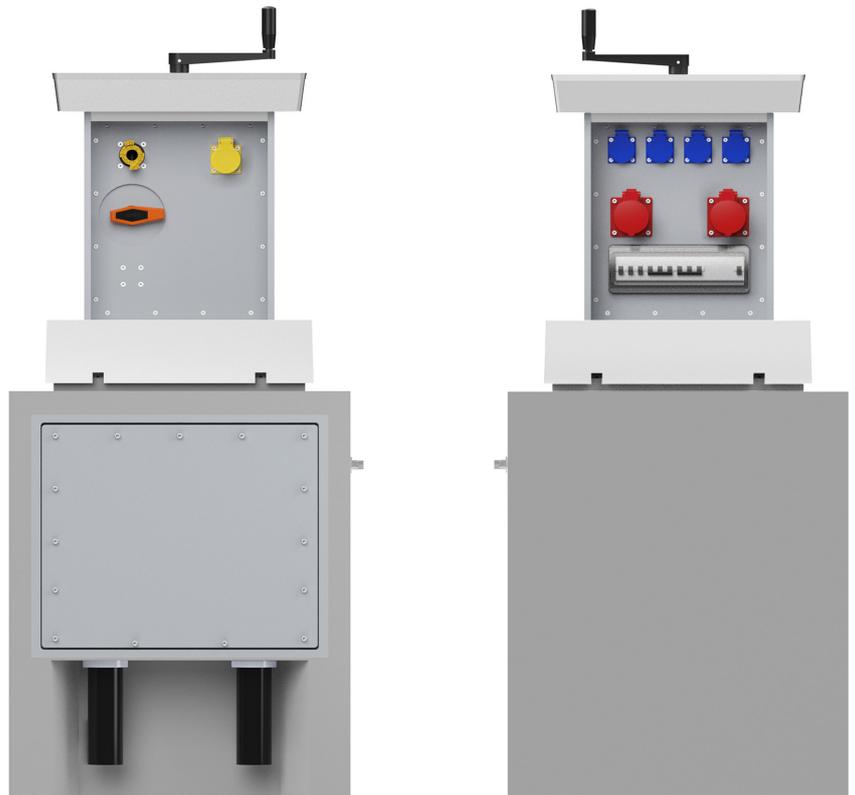

PRODUCT DATA SHEET


PAGE 2/2

DIMENSIONS

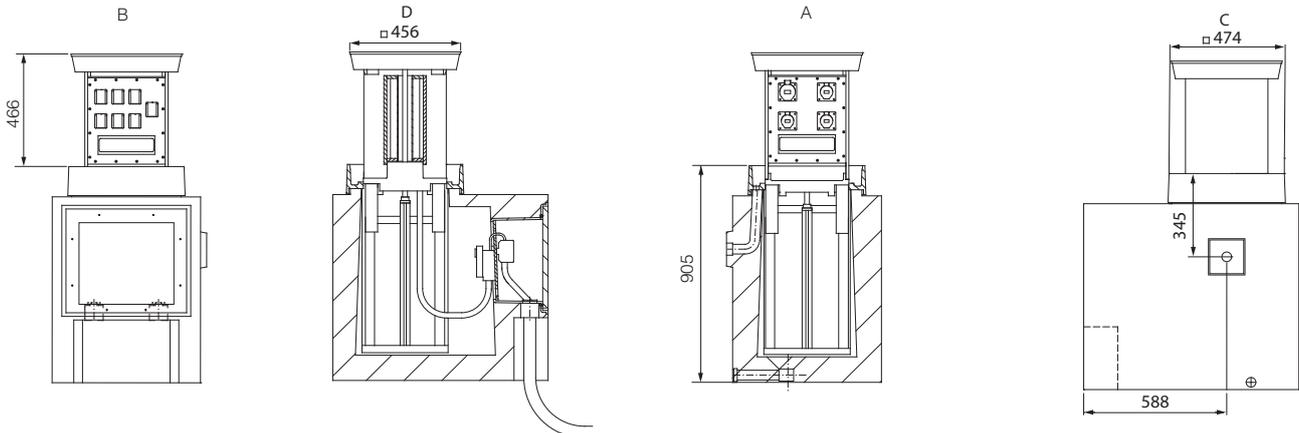

All dimensions in millimeters.

WIRING DIAGRAM

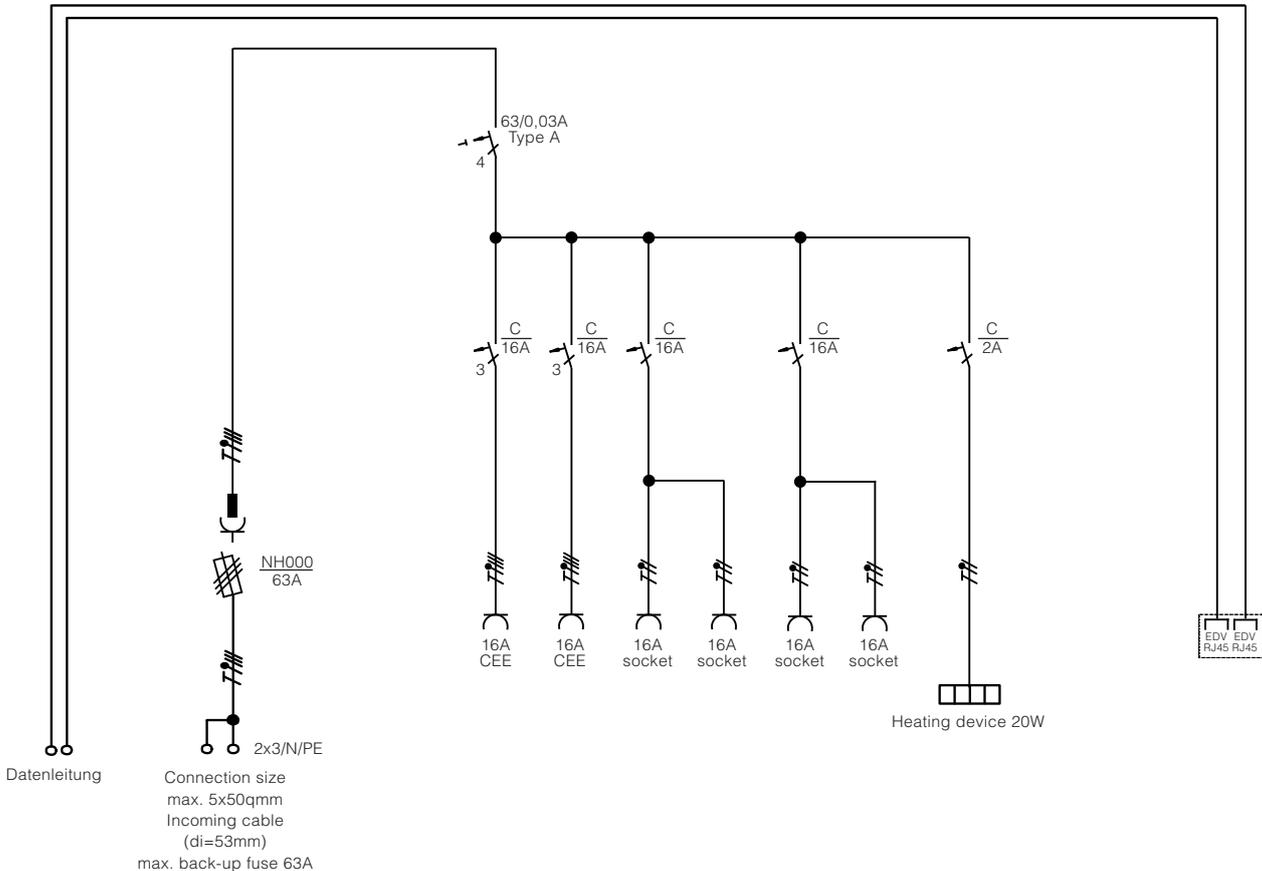

Modifications and errors excepted. No liability accepted for printing errors.
Our terms of delivery and payment apply.